

# CPD 20/25/30/35

GB2LI-H / GB2LI-M / GB3LI-S / GB3LI-M



**LITON** **2-3.5 t**

G2 Series Lithium-ion Battery  
Forklift Truck




Fearless of Any Rough Application,  
**HELI New Series Lithium Forklift,**  
Your Best Choice





## Powerful Performance, High Efficiency


Customers can freely choose from the 3 different configurations: S, M, H. Especially M and H configurations are comparable with internal combustion trucks in terms of comprehensive performance.

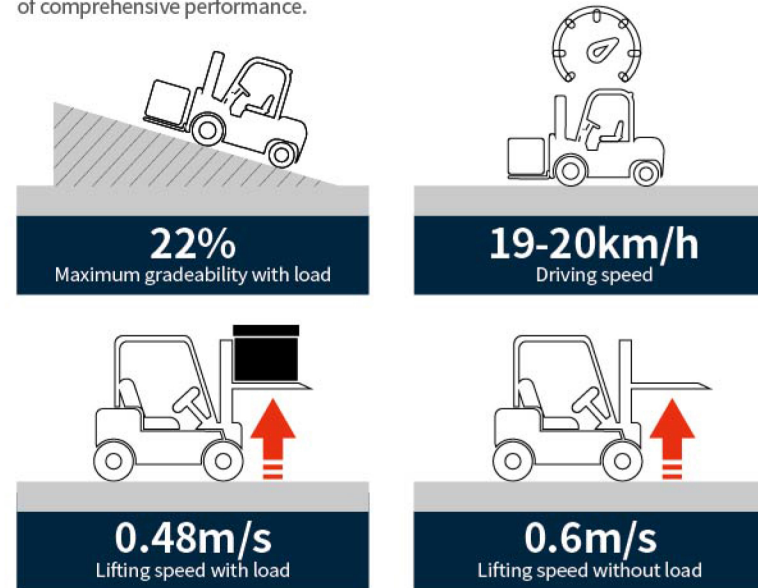

Note: the data displayed are all based on the model CPD30-GB2LI-H, and data for other trucks are shown in the table of technical parameters.

## Smart and Safe, Ease In All Aspects


- Steering deceleration: Auto steering deceleration reduces the risk of turning over;
- Steering started by steering wheel: the steering wheel can directly start the steering function and provides the required oil quantity according to the steering wheel speed;
- Color screen instrument: Bilingual (CN/EN) options, full vehicle information at a glance;
- PES Three-speed mode: Choose multiple speed modes according to working conditions, guarantee work efficiency;
- Rear handle with horn switch for safer reversing;
- Lithium battery is automatically heated at low temperature, with excellent low temperature adaptability.

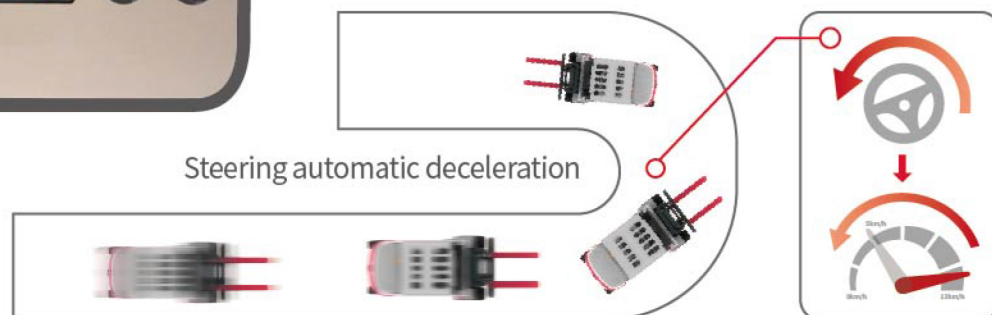

## Optimized Ergonomic Design, Better Driving Comfort



- Optimized mast and pressed overhead guard for improved visibility and safety.
- Ultra-low torque steering gear and lighter steering operation reduces driving fatigue.

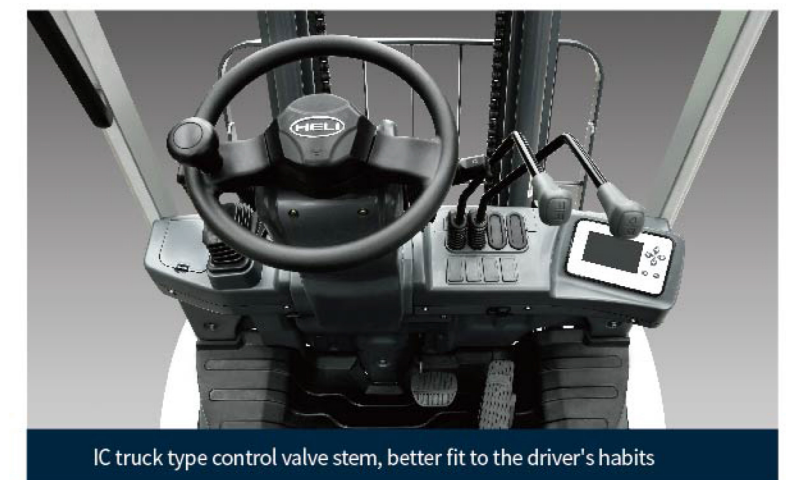




坡度20%


## High Quality & High Reliability

The integrated cast drive axle and reinforced cast steering axle have been proven in the market and are mature and reliable. The mast force optimization design improves the overall performance and effectively ensures the operation safety.

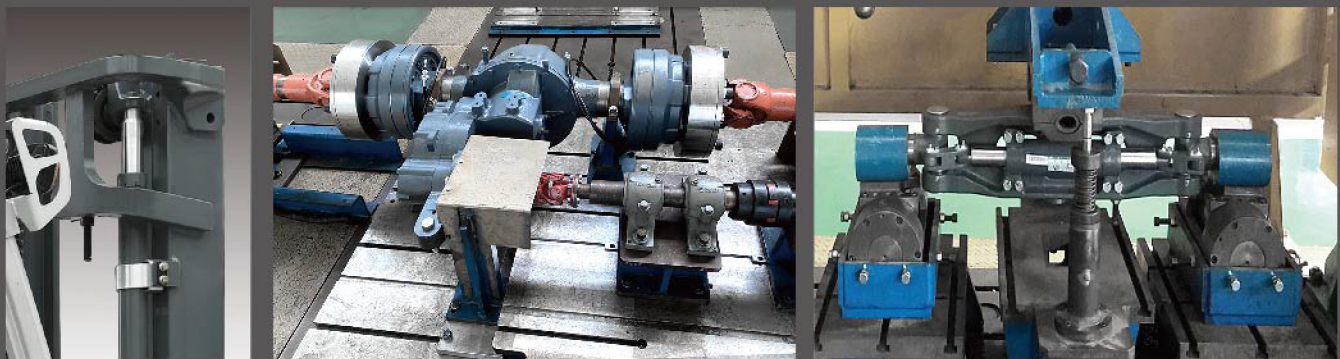

## Centralized Checkpoints, Easy Maintenance

The electrical design is concentrated on the top of lithium battery, and the maintenance points are centralized, which is convenient for inspection and maintenance.




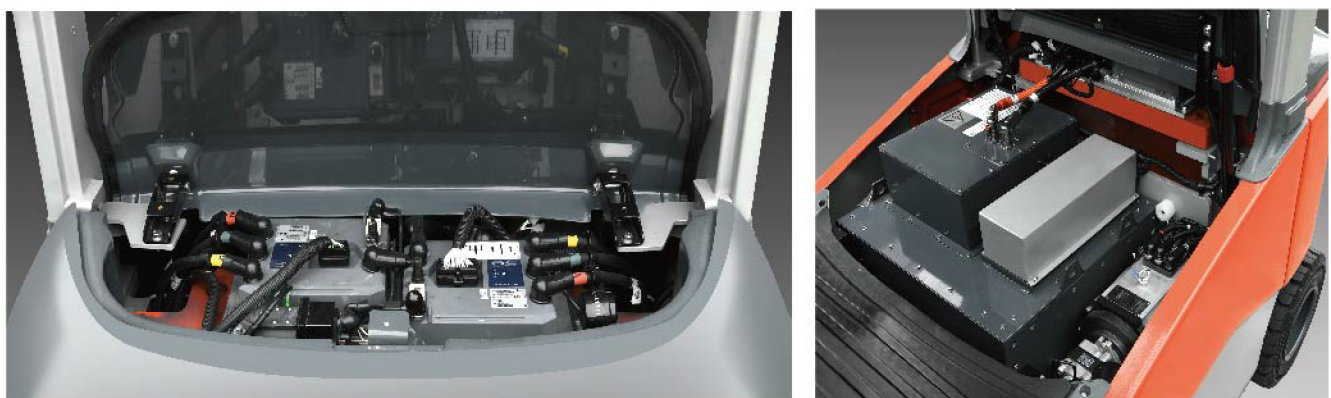




## Tested in Rough Operating Environment



## Lithium Battery Advantages

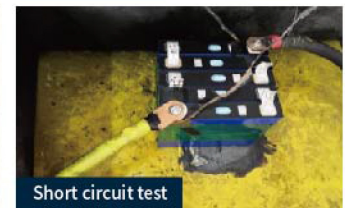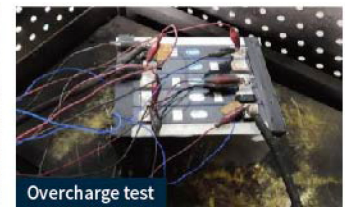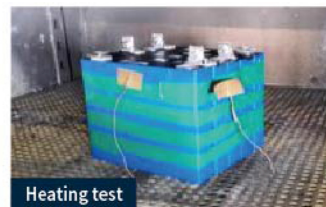
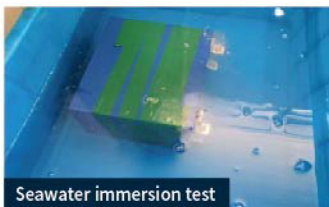


- The truck selects mature and economical square iron phosphate lithium battery core and module used by large numbers of commercial vehicles;
- The module adopts aluminum alloy plate frame, which is firm, light in weight and has good heat dissipation effect;
- Fast charging: fast charging makes truck gapless operation possible, and it can be filled in 2 hours;
- High efficiency and safety: The charging and discharging efficiency is up to 98%, and temperature of thermal runaway is over 600 °C;
- Low temperature adaptability: Standard configuration of heating function ensures normal operation of low temperature environment;
- Long service life: the normal charging and discharging cycles is more than 3000 times or 5 years, and capacity retention rate is more than 75%;
- Maintenance free: the battery does not need manual maintenance and does not need to add distilled water electrolyte;
- Green and clean: no pollution and zero emission.



Manufacturer and Technical Data															
Characteristics															
1.01	Manufacturer														
1.02	Model		CPD20	CPD25	CPD20	CPD25	CPD20	CPD25	CPD30	CPD35	CPD30	CPD35	CPD30	CPD35	
1.03	Configuration number		GB2LI-H	GB2LI-H	GB2LI-M/GB3LI-M	GB2LI-M/GB3LI-M	GB3LI-S	GB3LI-S	GB2LI-H	GB2LI-H	GB2LI-M/GB3LI-M	GB2LI-M/GB3LI-M	GB3LI-S	GB3LI-S	
1.04	Rated capacity	Q	kg	2000	2500	2000	2500	2000	2500	3000	3500	3000	3500	3000	
1.05	Load center distance	c	mm	500					500						
1.06	Load Distance	y	mm	460					477	482	477	482	477	482	
Weight															
2.01	Total weight (with/without battery)		kg	3570/3350	3960/3740	3570/3350	3960/3740	3570/3350	3960/3740	4580/4230	5000/4650	4580/4230	5000/4650	4580/4230	
Tyres															
3.01	Tyre type			pneumatic tyre	pneumatic tyre	pneumatic tyre	pneumatic tyre	pneumatic tyre	pneumatic tyre	pneumatic tyre/solid	solid tyre	pneumatic tyre/solid	solid tyre	pneumatic tyre/solid	
3.02	Tyre size, front			7.00-12-14PR					28×9-15-14PR		28×9-15		28×9-15-14PR		
3.03	Tyre size, rear			18×7-8-14PR					200/50-10						
Dimensions															
4.01	Height (mast lowered)	h1	mm	2000	2000	2000	2000	2000	2000	2070	2120	2070	2120	2070	
4.02	Max. height, extended (with backrest)	h4	mm	4030					4217						
4.03	Overall length (with fork)	l1	mm	3352	3502	3352	3502	3352	3502	3639	3644	3639	3644	3639	
4.04	Overall length (without fork)	l2	mm	2432	2432	2432	2432	2432	2432	2569	2574	2569	2574	2569	
4.05	Overall width	b1	mm	1160					1225						
4.06	Min. outside turning radius	Wa	mm	2070					2215						
4.07	Seat height relating to SIP (to ground)	h7	mm	1140					1150						
4.08	Distance across fork-arms, Max./Min.	m1	mm	115					130						
4.09	Ground clearance (center of wheelbase)	m2	mm	130					140						
4.10	Right angle stacking aisle width for pallet 1000 x1200mm crossways	Ast	mm	3730	3730	3730	3730	3730	3730	3894	3899	3894	3899	3894	
4.11	Right angle stacking aisle width for pallet 800 x1200mm lengthways	Ast	mm	3930	3930	3930	3930	3930	3930	4094	4099	4094	4099	4094	
4.12	Min. outside turning radius	Wa	mm	2070					2215						
Performance Data															
5.01	Travel speed (laden/unladen)		km/h	19/20		18/19		14/15		19/20		18/19		14/15	
5.02	Lift speed (laden/unladen)		m/s	0.49/0.6	0.47/0.6	0.46/0.56	0.44/0.56	0.38/0.49	0.35/0.49	0.48/0.6	0.44/0.54	0.41/0.54	0.39/0.54	0.37/0.49	
5.03	Max. gradeability (laden/unladen)		%	25/28	24/28	22/28	20/28	18/25	16/25	22/28	20/28	20/28	18/28	16/25	
Battery															
6.01	Battery voltage/Capacity		V/Ah	80/271	80/271	80/271	80/271	80/202	80/202	80/404	80/404	80/404	80/404	80/272	
6.02	Battery weight		kg	220	220	220	220	220	220	350	350	350	350	350	
Motor and controller															
7.01	Driving motor powering (S2-60min)		kW	17		16.6		15		17		16.6		15	
7.02	Lifting motor powering (S3-15%)		kW	26		25.5		21		26		25.5		21	

Note : for configuration number, 2:ZAPI controller;3:Inmotion controller.

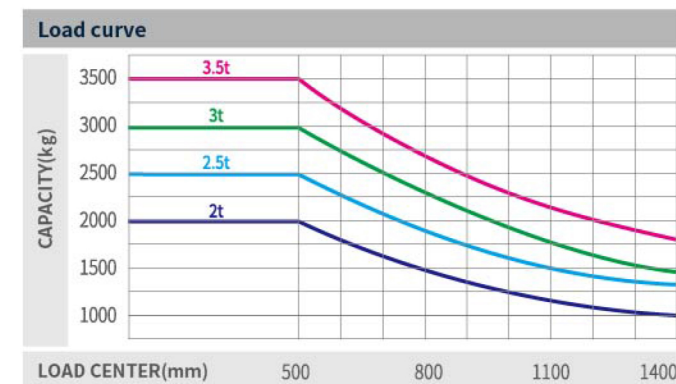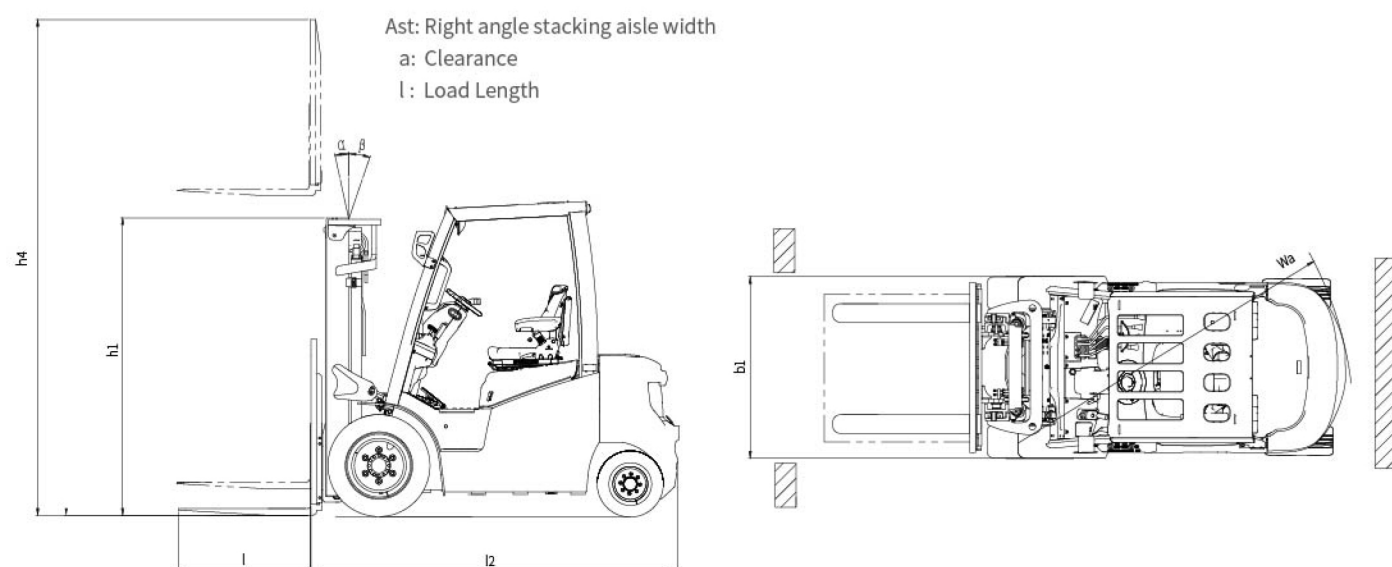

**Note:** The vertical axis stands for load capacity and the horizontal axis stands for load center which is calculated from the front surface of the forks to the gravity of the standard load. the standard load means a cubic with 1000mm edge length. When mast is tilted forward, using non-standard forks or loading large goods, the load capacity will be reduced. The load capacity of standard mast at different load center can be known from this load chart.



### Wide View Standard Mast

Mast model	Max.lifting height (mm)	Load capacity (lode center 500mm)(kg)				Height (mast lowered) (mm)				Free lift (with backrest) (mm)				Service weight (kg)				Mast tilt angle $\alpha/\beta$ (°)
		2t	2.5t	3t	3.5t	2t	2.5t	3t	3.5t	2t	2.5t	3t	3.5t	2t	2.5t	3t	3.5t	
M200	2000	2000	2500	3000	3500	1500	1500	1570	1620	150	150	155	160	3480	3870	4484	4894	6-12
M250	2500	2000	2500	3000	3500	1750	1750	1820	1870	150	150	155	160	3525	3915	4532	4947	6-12
M300	3000	2000	2500	3000	3500	2000	2000	2070	2120	150	150	155	160	3570	3960	4580	5000	6-12
M330	3300	2000	2500	3000	3500	2150	2150	2220	2270	150	150	155	160	3597	3987	4609	5032	6-12
M350	3500	2000	2500	3000	3500	2250	2250	2320	2370	150	150	155	160	3615	4005	4628	5053	6-12
M370	3700	2000	2500	3000	3500	2350	2350	2420	2470	150	150	155	160	3633	4023	4647	5074	6/6
M400	4000	2000	2500	3000	3500	2550	2550	2620	2670	150	150	155	160	3710	4100	4727	5158	6/6
M425	4250	*1950 *2000	*2450 *2500	*2850 *2900	*3300 *3400	2675	2675	2745	2795	150	150	155	160	3733	4123	4751	5184	6/6 *6/12
M450	4500	*1900 *1950	*2300 *2400	*2750 *2850	*3150 *3350	2800	2800	2870	2920	150	150	155	160	3755	4145	4775	5211	6/6 *6/12
M500	5000	*1800 *1850	*2100 *2200	*2400 *2800	*2850 *2900	3050	3050	3120	3170	150	150	155	160	3800	4190	4823	5264	6/6 *6/12
M550	5500	*1450 *1700	*1500 *2150	*2250 *2650	*2350 *2700	3350	3350	3420	3470	150	150	155	160	3895	4285	4921	5368	6/6 *6/12
M600	6000	*1050 *1600	*1150 *1800	*1500 *2200	*1650 *2400	3600	3600	3670	3720	150	150	155	160	3940	4330	4969	5421	6/6 *6/12

Note: (1) \* refers to the rate capacity when the front wheel of the truck is dual tyre.  
 (2) When the front wheel of 2-3.5t is dual tyre, the weight is the data in the table plus 100kg;

### Wide View Full Free 2-Stage Mast

Mast model	Max.lifting height (mm)	Load capacity (lode center 500mm)(kg)				Height (mast lowered) (mm)				Free lift (with backrest) (mm)				Service weight (kg)				Mast tilt angle $\alpha/\beta$ (°)
		2t	2.5t	3t	3.5t	2t	2.5t	3t	3.5t	2t	2.5t	3t	3.5t	2t	2.5t	3t	3.5t	
ZM200	2000	2000	2500	3000	3500	1500	1500	1570	1620	496	496	340	443	3492	3882	4505	4911	6-12
ZM250	2500	2000	2500	3000	3500	1750	1750	1820	1870	746	746	590	693	3540	3930	4555	4964	6-12
ZM300	3000	2000	2500	3000	3500	2000	2000	2070	2120	996	996	840	943	3587	3977	4605	5018	6-12
ZM330	3300	2000	2500	3000	3500	2150	2150	2220	2270	1146	1146	990	1093	3617	4007	4637	5051	6-12
ZM350	3500	2000	2500	3000	3500	2250	2250	2320	2370	1246	1246	1090	1193	3635	4025	4657	5072	6-12
ZM370	3700	2000	2500	3000	3500	2350	2350	2420	2470	1346	1346	1190	1293	3655	4045	4677	5093	6/6
ZM400	4000	2000	2500	3000	3500	2550	2550	2620	2670	1546	1546	1390	1493	3731	4121	4755	5173	6/6
ZM425	4250	*1950 *2000	*2450 *2500	*2850 *2900	*3300 *3400	2675	2675	2745	2795	1671	1671	1515	1618	3755	4145	4781	5200	6/6 *6/12
ZM450	4500	*1900 *1950	*2300 *2400	*2750 *2850	*3150 *3350	2800	2800	2870	2920	1796	1796	1640	1743	3781	4171	4809	5229	6/6 *6/12
ZM500	5000	*1800 *1850	*2100 *2200	*2400 *2800	*2850 *2900	3050	3050	3120	3170	2046	2046	1890	1993	3832	4222	4863	5285	6/6 *6/12
ZM550	5500	*1450 *1700	*1500 *2150	*2250 *2650	*2350 *2700	3350	3350	3420	3470	2346	2346	2190	2293	3929	4319	4962	5388	6/6 *6/12
ZM600	6000	*1050 *1600	*1150 *1800	*1500 *2200	*1650 *2400	3600	3600	3670	3720	2596	2596	2440	2543	3979	4369	5015	5444	6/6 *6/12

Note: (1) \* refers to the rate capacity when the front wheel of the truck is dual tyre.  
 (2) When the front wheel of 2-3.5t is dual tyre, the weight is the data in the table plus 100kg;  
 (3) 2-2.5t: The free lifting height is increased by 356 mm when there is no backrest;  
 (4) 3T: The free lifting height is increased by 520mm when there is no backrest;  
 (5) 3.5t: The free lifting height is increased by 426 mm when there is no backrest;

### Wide View Full Free 3-Stage Mast

Mast model	Max.lifting height (mm)	Load capacity (lode center 500mm)(kg)				Height (mast lowered) (mm)				Free lift (with backrest) (mm)				Service weight (kg)				Mast tilt angle $\alpha/\beta$ (°)
		2t	2.5t	3t	3.5t	2t	2.5t	3t	3.5t	2t	2.5t	3t	3.5t	2t	2.5t	3t	3.5t	
ZSM360	3600	2000	2500	3000	3500	1800	1800	1870	1870	796	796	640	690	3714	4104	4723	5109	6/6
ZSM400	4000	2000	2500	3000	3500	1950	1950	2020	2020	946	946	790	840	3755	4145	4764	5150	6/6
ZSM435	4350	*1900 *2000	*2400 *2500	*2850 *2900	*3200 *3350	2050	2050	2120	2120	1046	1046	890	940	3786	4176	4793	5179	6/6 *6/12
ZSM450	4500	*1850 *1900	*2300 *2350	*2700 *2850	*3050 *3200	2100	2100	2170	2170	1096	1096	940	990	3799	4189	4808	5194	6/6 *6/12
ZSM470	4700	*1800 *1850	*2200 *2250	*2650 *2800	*2900 *2950	2165	2165	2230	2230	1161	1161	1000	1050	3818	4208	4826	5212	6/6 *6/12
ZSM480	4800	*1800 *1850	*2200 *2250	*2600 *2750	*2900 *2950	2210	2210	2270	2270	1206	1206	1040	1090	3831	4221	4836	5222	6/6 *6/12
ZSM500	5000	*1700 *1800	*2100 *2200	*2450 *2800	*2800 *2900	2300	2300	2370	2370	1296	1296	1140	1190	3854	4244	4863	5249	6/6 *6/12
ZSM540	5400	*1450 *1700	*1500 *2150	*2250 *2650	*2350 *2700	2400	2400	2470	2470	1396	1396	1240	1290	3886	4276	4893	5279	6/6 *6/12
ZSM600	6000	*1000 *1600	*1100 *1800	*1400 *2200	*1650 *2400	2600	2600	2670	2670	1596	1596	1440	1490	3989	4379	4997	5383	6/6 *6/12
ZSM650	6500	*1450	*1650	*2000	*2200	2800	2800	2870	2870	1796	1796	1640	1690	4045	4435	5052	5438	*6/6
ZSM700	7000	*1150	*1300	*1800	*2000	2975	2975	3045	3045	1971	1971	1815	1865	4095	4485	5102	5488	*3/3
ZSM750	7500	*950	*1050	*1200	*1300	3150	3150	3370	3370	2146	2146	2140	2190	4151	4541	5157	5543	*3/3

Note: (1) \* refers to the rate capacity when the front wheel of the truck is dual tyre.  
 (2) When the front wheel of 2-3.5t is dual tyre, the weight is the data in the table plus 100kg;  
 (3) 2-2.5t: The free lifting height is increased by 356 mm when there is no backrest;  
 (4) 3.5t: The free lifting height is increased by 426 mm when there is no backrest;




# Operating Cost Comparison: Lithium battery forklift **vs.** Lead-acid battery forklift **vs.** IC forklift

The advantages of HELI lithium battery forklift trucks are more prominent in the life cycle cost.

Compared with internal combustion forklift truck, lithium battery forklift truck has the advantages of no noise, no pollution, small vibration and simple operation.

Compared with the lead-acid battery forklift truck, lithium battery forklift has the characteristics of fast charging and charging at any time, which is more suitable for multi shift operation.

Besides, HELI lithium battery forklift is maintenance free, high power conversion efficiency, and economical overall operation cost.

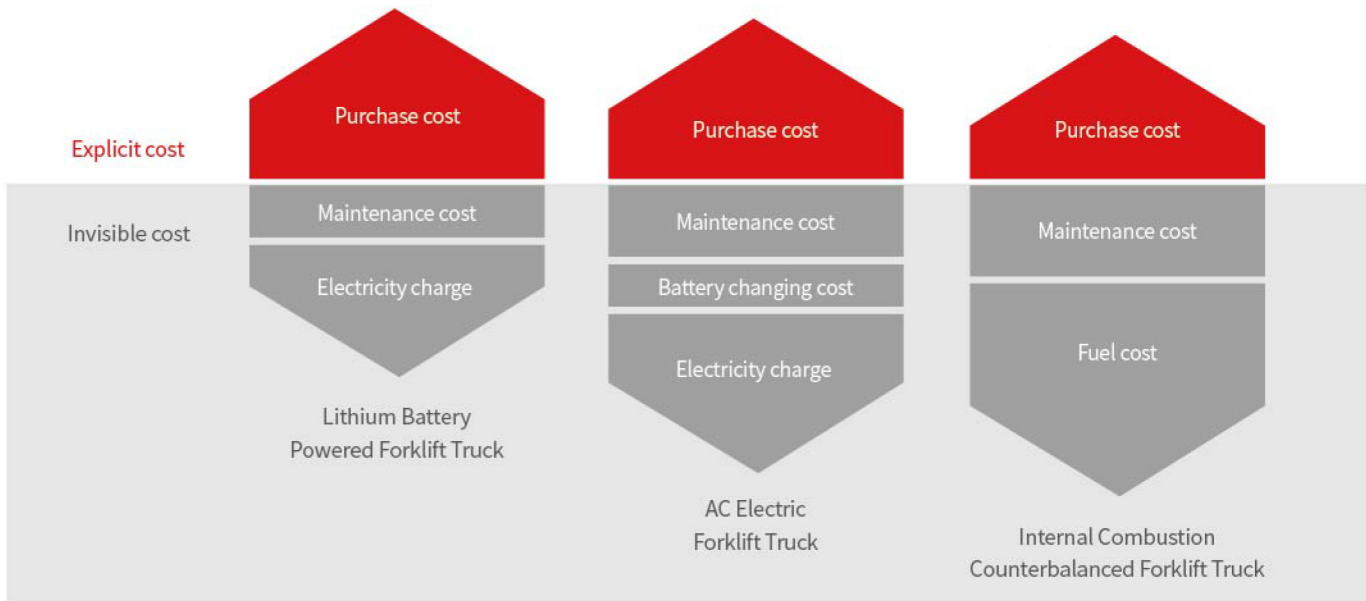

Lithium battery								
Lithium battery brand	Pengcheng (CATL module/Core)				Heli(LISHEN module/Core)			
Voltage/Capacity	80V/202Ah	80V/271Ah	80V/404Ah	80V/542Ah	80V/202Ah	80V/272Ah	80V/404Ah	80V/544Ah
2-2.5t S model	○	○	○	—	●	○	○	—
2-2.5t M model	—	●	○	—	—	○	○	—
2-2.5t H model	—	●	○	—	—	○	○	—
3-3.5t S model	—	○	○	○	—	●	○	○
3-3.5t M model	—	—	●	○	—	—	○	○
3-3.5t H model	—	—	●	○	—	—	○	○
Lithium battery heating in low temperature					●			

NOTE: "●" standard ; "○" optional ; "—" not applicable

Color Options (the color of truck body can be customized)			
Model	H	M	S
Standard Configuration			



**HELI**



**Gemini Equipment And Rentals Pvt. Ltd.**

1706-1709, The Corporate Park 17th Floor Plot No-14-15  
Vashi Navi Mumbai -400705, India.

Email id : [info@gear-india.com](mailto:info@gear-india.com) | Contact No: +918451934343 |

Website: [www.gear-india.com](http://www.gear-india.com)